



NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

Rev.	Rev. Date	Modified By	Brief Description

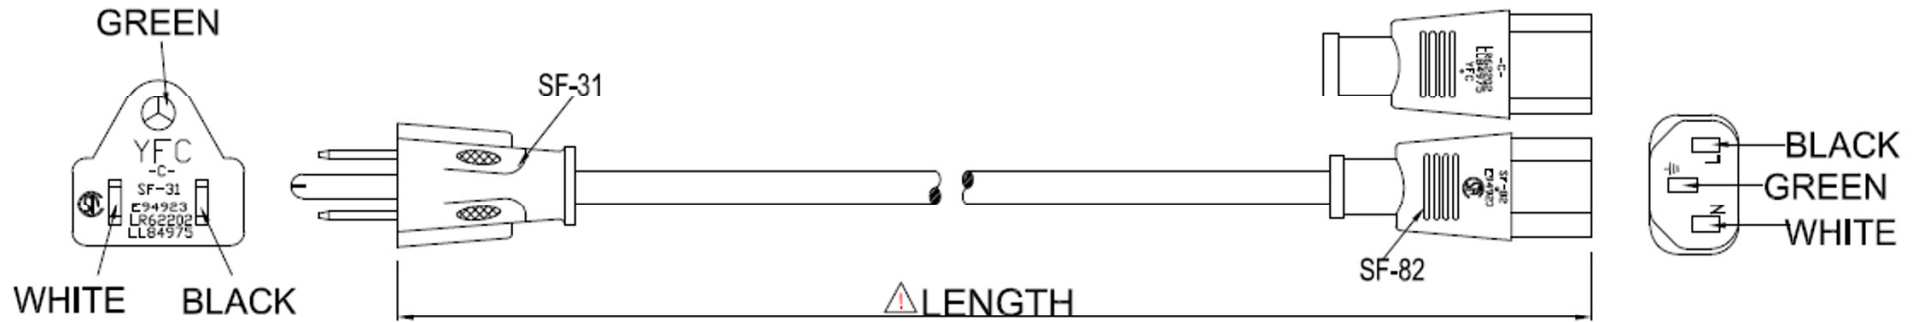

Item	LENGTH(ft)	tolerance(ft)	LENGTH(mm)	tolerance(mm)
210106BK	1.5Ft	±0.03	457	±10
210107BK	4Ft	±0.05	1220	±15
210101BK	6Ft	±0.06	1829	±20
210108BK	12Ft	±0.1	3658	±35
210109BK	5Ft	±0.06	1524	±20

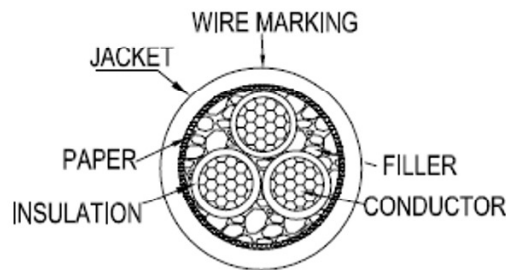

<b>WIRE MARKING:</b> (Hollow)		(UL) E135710-F3 SVT 3X18AWG 60°C 300V VW-1 CSA LL95737 SVT 3X0.824mm2(18AWG) 60°C 300V FT2 YFC-BONEAGLE					
Conductor		Insulation			Jacket		Overall diameter
AWG	Resistance maximum (±)	Mln.Thick	Diameter	Length of Lay	Mln.Thick	AVG.Thick	
18# (41/0.154)	at20°C≤22.4ohms/km at25°C≤22.8ohms/km	0,33mm	2.0±0.1mm	44↓mm	0,61mm	0,76mm	6.3±0.1mm
<b>(NOTE: IF THE CONDUCTORS O.D IS GO BEYOND THE SCOPE, THE RESISTANCE OF CONDUCTOR IS STANDARD THEN)</b>							

ELECTRIC TESTING:

1. 100% OPEN & SHORT TESTING .
2. VOLTAGE RATING:AC ≥1500V/S
3. PLUG(SF-31) RATED POWER:  
125V 10A UL-E94923 CSA-LR62202
4. PLUG(SF-82) RATED POWER:  
125V 10A UL-E94923 CSA-LR62202
5. WIRE: SVT 18/3 RATED  
POWER:300V 10A UL-E135710 CSA-LL95737
6. COLOR:BLACK

**My Cable Mart, LLC**

DRAWN BY:DHY	DATE: 2012/04/18	DESCRIPTION: SVT 18/3 SF-31+SF-82	
CHECKED BY:wuxiao	SHEET 1 of 1	ITEM NO.	
APPROVED BY	SCALE 1:1	REV. 00	UNIT: mm