

TECHNICAL SPECIFICATION

P-USBA-AF-XXACT

Description: Active USB Cable - Built in Repeater - A-Male to A-Female
- Longer Distances up to 75', Plenum


Why This Cable?

Active USB Cables have built in circuitry allowing for much longer cable runs. These cables are available up to 75ft.



Technical Specification

Connectors:	USB A - Male to USB A - Female
Number of Repeaters	25ft. & 35ft. = 1 50ft. & 75ft. = 2
Power Consumption	52mA
Maximum Inrush Current	500mA
Connector Hood:	Over-Mold, Dark Blue
Cable Jacket:	PVC, Dark Blue
Cable Conductors:	24 AWG*1P+22 AWG*2C
Outer Diameter:	0.24"
Minimum Bend Radius:	2.4"
Maximum Tensile:	10 kgf
Operating/Storage Temperature:	-10°C ~ + 75°C
Operating Humidity:	50% ~ 75%
Number of Connector Mating Cycles:	1500
Compliances:	RoHS, Type CMP
Available Lengths:	25ft., 35ft., 50ft., & 75ft.

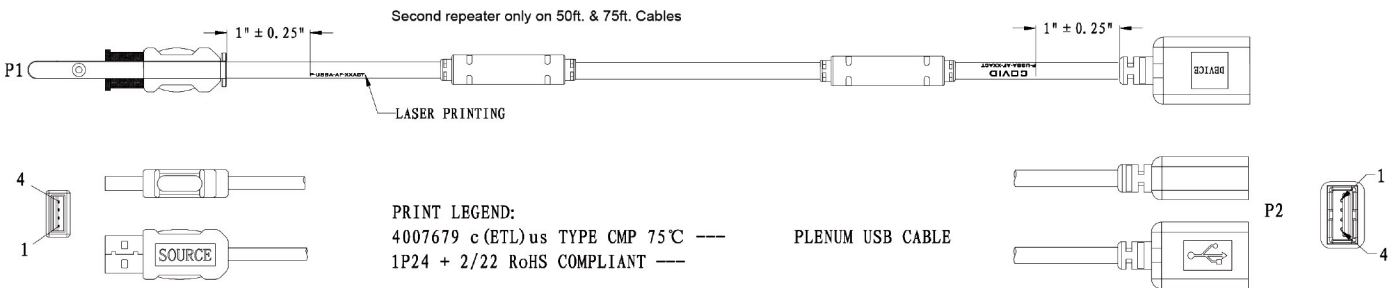

ACTIVE USB 2.0 Cable - A Male to A Female
Plenum

Part Number:	P-USBA-AF-XXACT
Revision Number:	1
Date:	1-1-2018
Page Number:	1 of 1