


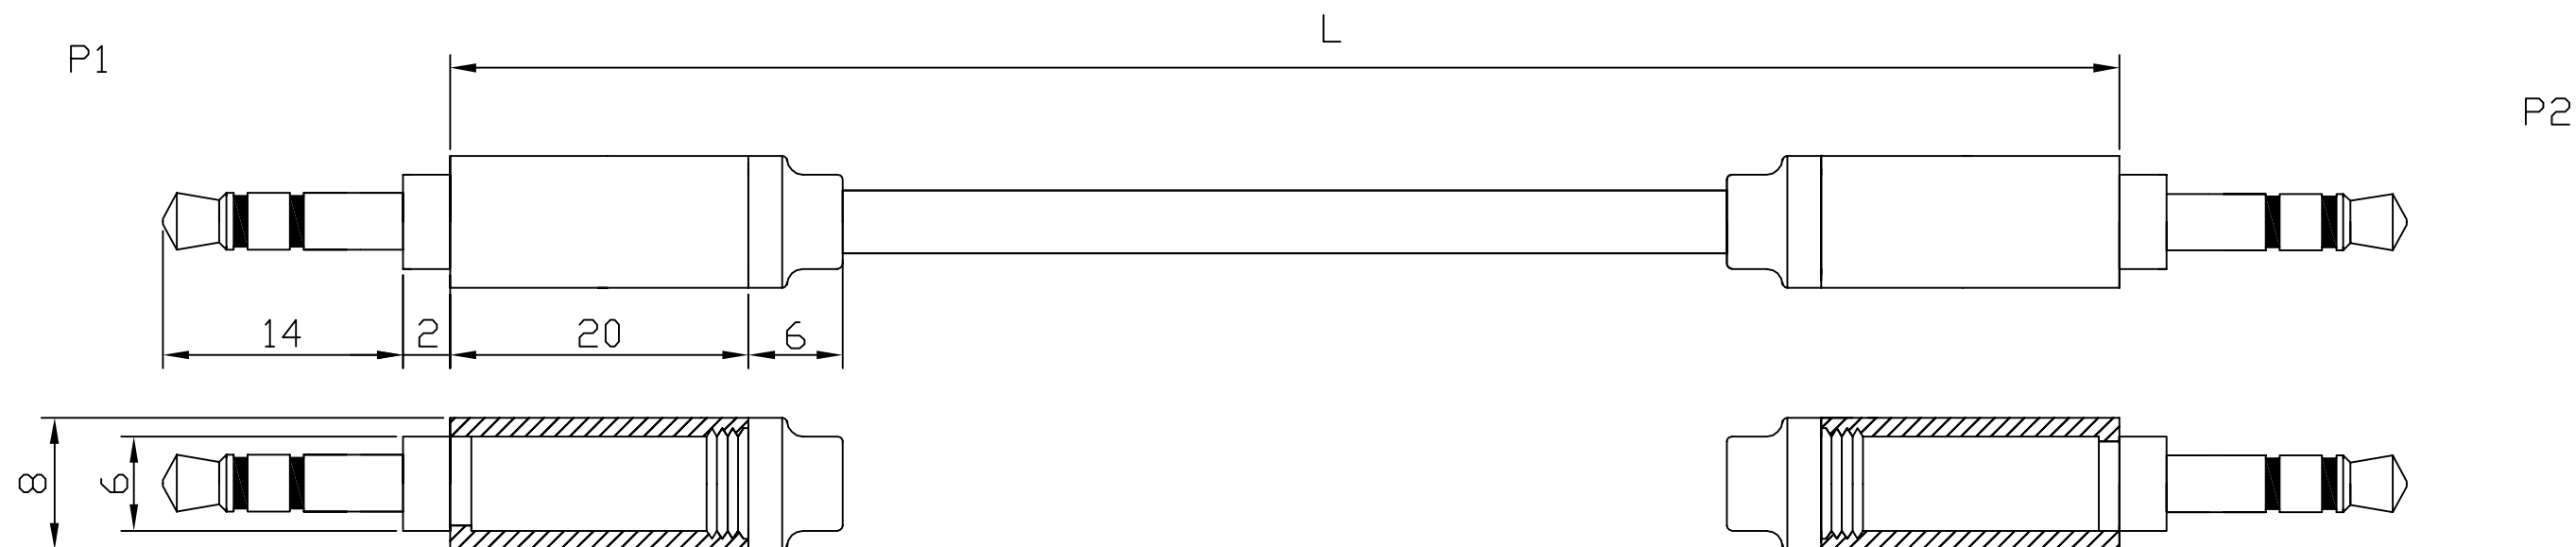


PIN ASSIGNMENT:

P1:	1	2	3
P2:	1	2	3

NOTES:

- 100% OPEN & SHORT TESTING
- VOLTAGE: 300V DC
- INSULATION RESISTANCE: 20M ohm
- CONTACT RESISTANCE: 1 ohm

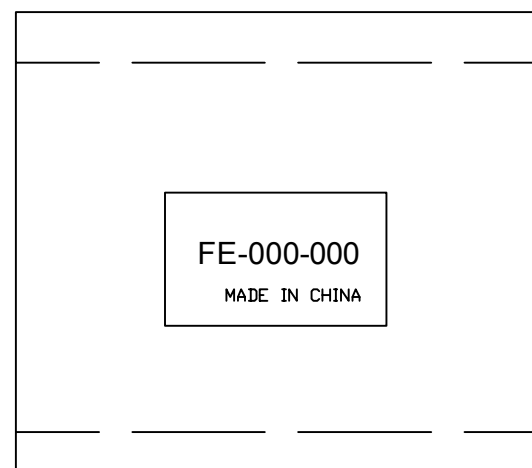

PART NO.	LENGTH
FE-PX3MM-MM-6IN	150(6IN)±20MM
FE-PX3MM-MM-01	450(1.5FT)±20MM
FE-PX3MM-MM-02	600(2FT)±20MM
FE-PX3MM-MM-03	910(3FT)±30MM
FE-PX3MM-MM-06	1830(6FT)±50MM
FE-PX3MM-MM-10	3050(10FT)±50MM
FE-PX3MM-MM-12	3660(12FT)±80MM
FE-PX3MM-MM-15	4570(15FT)±80MM
FE-PX3MM-MM-20	6100(20FT)±100MM
FE-PX3MM-MM-25	7620(25FT)±120MM
FE-PX3MM-MM-35	10670(35FT)±150MM
FE-PX3MM-MM-50	15240(50FT)±150MM
FE-PX3MM-MM-75	22860(75FT)±200MM
FE-PX3MM-MM-100	30480(100FT)±200MM

8			MY CABLE MART LLC			
7						
6						
5						
4		PCV45Pa BLACK				
3		3.5MM PLUG Copper Metal Housing	Title: 3.5MM STEREO M/M			
2		3.5MM STEREO PLUG Gold				
1		24AWG(7/0.2BC)*2C + AL + B(32*0.1BC) OD: 4.0mm BLACK PVC JACKET	Customer: MY CABLE MART LLC		Page: 1/1	Drawn BY: CLR
			Customer P/N:		REV: A	Check BY: DYH
NO.	Material	Description	Date: 2020.11.18	Drawing NO.:	Unit: mm	Appd BY: