
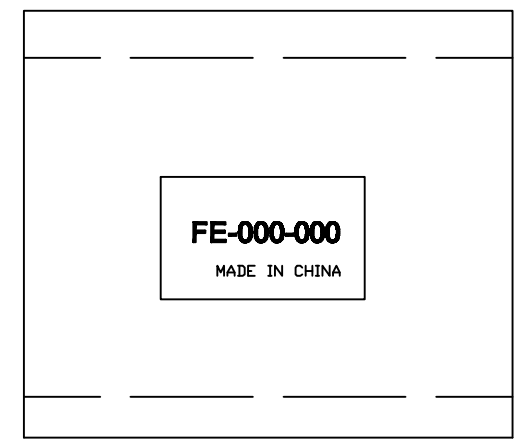


PIN ASSIGNMENT:

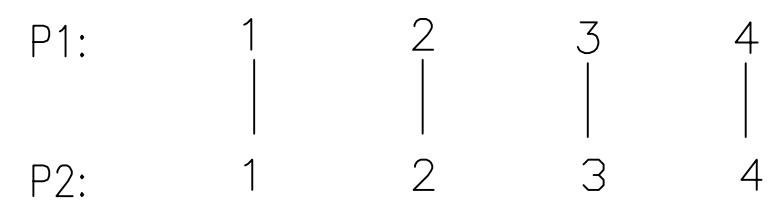

PART NO.	LENGTH
FE-PX4CT-MM-6IN	150(6IN)±20MM
FE-PX4CT-MM-01	450(1.5FT)±20MM
FE-PX4CT-MM-02	600(2FT)±20MM
FE-PX4CT-MM-03	910(3FT)±30MM
FE-PX4CT-MM-06	1830(6FT)±50MM
FE-PX4CT-MM-10	3050(10FT)±50MM
FE-PX4CT-MM-12	3660(12FT)±80MM
FE-PX4CT-MM-15	4570(15FT)±80MM
FE-PX4CT-MM-20	6100(20FT)±100MM
FE-PX4CT-MM-25	7620(25FT)±120MM
FE-PX4CT-MM-35	10670(35FT)±150MM
FE-PX4CT-MM-50	15240(50FT)±200MM

NOTES:

- 1.100% OPEN & SHORT TESTING
- 2.VOLTAGE:300V DC
- 3.INSULATION RESISTANCE:20M ohm
- 4.CONTACT RESISTANCE:1 ohm

NO.	Material	Description
8		
7		
6		
5		
4	PCV45Pa	BLACK
3		3.5MM PLUG Copper Metal Housing
2		3.5MM 4 Conductor PLUG Gold
1		24AWG(7/0.2BC)*3C + AL + B(32*0.1BC) OD: 4.0mm BLACK PVC JACKET

MY CABLE MART LLC

Title: 3.5MM 4 Conductor M/M			
Customer: MY CABLE MART LLC	Page: 1/1	Drawn BY: CLR	
Customer P/N:	REV: A	Check BY: DYH	
Date: 2020.11.18	Drawing NO.:	Unit: mm	Appd BY: