


**NOTES:**

- Test Condition:
  - 100% OPEN & SHORT TEST;
  - Insulation Resistance: DC300V 5MΩ(Min) ;
  - Conductor Resistance: 5Ω/Max.
  - Hi-Pot:DC 300V/0.1s.
- The product is ROHS compliant.
- HDTV-DVD TEST:8K@60HZ
- PASS TDR、EMI、48G.

**PIN Assignment**

1	—	1
3	—	3
2	—	2
4	—	4
6	—	6
5	—	5
7	—	7
9	—	9
8	—	8
10	—	10
12	—	12
11	—	11
14	—	14
19	—	19
17	—	17
13	—	13
15	—	15
16	—	16
18	—	18
SHELL	—	SHELL

Client NO	GC-HHL48-10
Length L	3050±50mm(10FT)

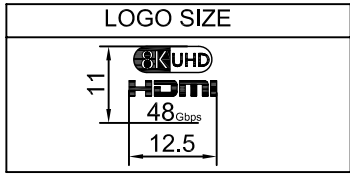

⑥	MESH	Nylon Mesh	PCS	1	
⑤	INNER MOLDED	45P Black PVC	g	12	
④	INNER MOLDED	PE	g	8	
③	SHELL	HDMI AM zinc alloy Shell	PCS	2	
②	CON	HDMI 2.1V AM Gold Plated Connector	PCS	2	
①	CABLE	[(28AWG+FPE)*2C+D+AL-foil+Adhesive-PET]*5P+(30AWG+HDPE)*4C+AL+AEB+Black PVC OD7.3mm	PC	1	
NO.	ITEM	DESCRIPTION	UNIT	Q'TY	Notes

	<b>MY CABLE MART LLC</b>							
					.X±0.15			
					.XX±0.10			
REV	A/O	Title	HDMI AM-AM	Draw	Song			
Scale	/	Customer	1-39	Checked				
Page	1/1	Item No.	-	Sales				
Unit	mm	Date	2021/10/27	Approval				

Drawing No. JXD-HD1105/G/BK/WA/28AWG/2.1V