


# Category 6A (10G) CMR 4-Pairs F/UTP Cable

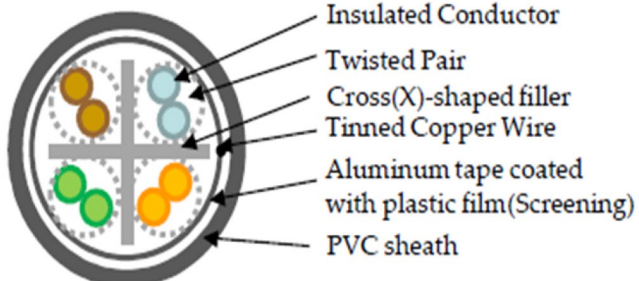

### Description

**23 AWG CAT 6A 4-Pairs F/UTP CMR, High-Performance Data Cable**

### Applicable Standards

- UL VERIFIED
- ANSI/TIA-568-C.2
- Alien Crosstalk and ROHS Compliant
- ATM 155 Mbps
- 10/100/1000/10G Base-T (IEEE 802.3)
- 4/16 Mbps Token Ring (IEEE 802.5)
- 100 Mbps TP-PMD
- ISDN, ADSL
- ATM LAN 1.2G
- Horizontal Distribution & Backbone Cabling

### Physical Characteristics

Number of Conductor Pairs	4
Size	23 AWG
Stranding	Solid Annealed Copper
Conductor Material	Solid Bare Copper
Shield Material	Aluminum Tape
Rip Cord	Yes
Insulation Material	HDPE
Insulation Diameter	0.041 in.
Jacket Material	Riser/CMR Rated PVC
Jacket Diameter	0.3153 in.
Jacket Spacer Thickness	0.0393 in.
Outer Sheath Thickness	.0177 in.
Nominal Weight	49 lbs.

### Color Code

Pair 1	White / Blue	Blue
Pair 2	White / Orange	Orange
Pair 3	White / Green	Green
Pair 4	White / Brown	Brown

### Cable Marking

XXXXXXXX 23AWG 4 PR FTP CMR 75C C(UL) US VERIFIED (UL)  
CATEGORY 6A ANSI/TIA-568-C.2 \*\*\*\*FT

### Electrical Performance

Frequency (MHz)	Attenuation (dB/100m)	Return loss (dB/100m)	NEXT (dB/100m)	PS-NEXT (dB)
1	2.1	20.0	74.3	72.3
4	3.8	23.0	65.3	63.3
8	5.3	24.5	60.8	58.8
10	5.9	t	59.3	57.3
16	7.5	25.0	56.2	54.2
20	8.4	25.0	54.8	52.8
25	9.4	24.3	53.3	51.3
31.25	10.5	23.6	51.9	49.9
62.5	15.0	21.5	47.4	45.4
100	19.1	20.1	44.3	42.3
200	27.6	18.0	39.8	37.8
250	31.1	17.3	38.3	36.3
300	34.3	16.8	37.1	35.1
400	40.1	15.9	35.3	33.3
500	45.3	15.2	33.8	31.8

Frequency (MHz)	ELFEXT (dB/100m)	PS-ELFEXT (dB/100m)	PS-ANEXT (dB/100m)	PS-AELFEXT (dB/100m)
1	67.8	64.8	67.0	67.0
4	55.8	52.8	67.0	66.2
8	49.7	46.7	67.0	60.1
10	47.8	44.8	67.0	56.2
16	43.7	40.7	67.0	54.1
20	41.8	38.8	67.0	52.2
25	39.8	36.8	67.0	50.2
31.25	37.9	34.9	67.0	48.3
62.5	31.9	28.9	65.6	42.3
100	27.8	24.8	62.5	38.2
200	21.8	18.8	58.0	32.2
250	19.8	16.8	56.5	30.2
300	18.3	15.3	55.3	28.7
400	15.8	12.8	53.5	26.2
500	13.8	10.8	52.0	24.2

### Electrical Characteristics

DC Resistance	9.38 Ω / 100 Meters	
DC Resistance Unbalanced	4%	
Mutual Capacitance	5.6 nF / 100 Meters	
Capacitance Unbalance (Pair to Ground)	330 pF / 100 Meters	
Characteristic Impedance	100 ± 15 Ω	
Delay Skew	45 nS / 100 Meters	
Temperature Rating	Installation	0 to + 60°C
	Storage	-20°C to + 80°C
Tensile Strength	Before	> = 13.8 Mpa
Elongation	Aging	> = 100%
Aging Condition		100°C x 168 hours
	After	> = 85% of unaged
	Aging	> = 50% of unaged

### Part Number

Part Number	Color	Put-up
6A04FRBL2	Blue	1,000' Reel